



HOW TO MAKE A SANDPIT

INSTRUCTIONAL GUIDE

TOOLS REQUIRED



18V Cordless Circular Saw




18V Brushless Drill Driver




18V Brushless Impact Wrench



18V Cordless Detail Sander



18V 4.0Ah Battery

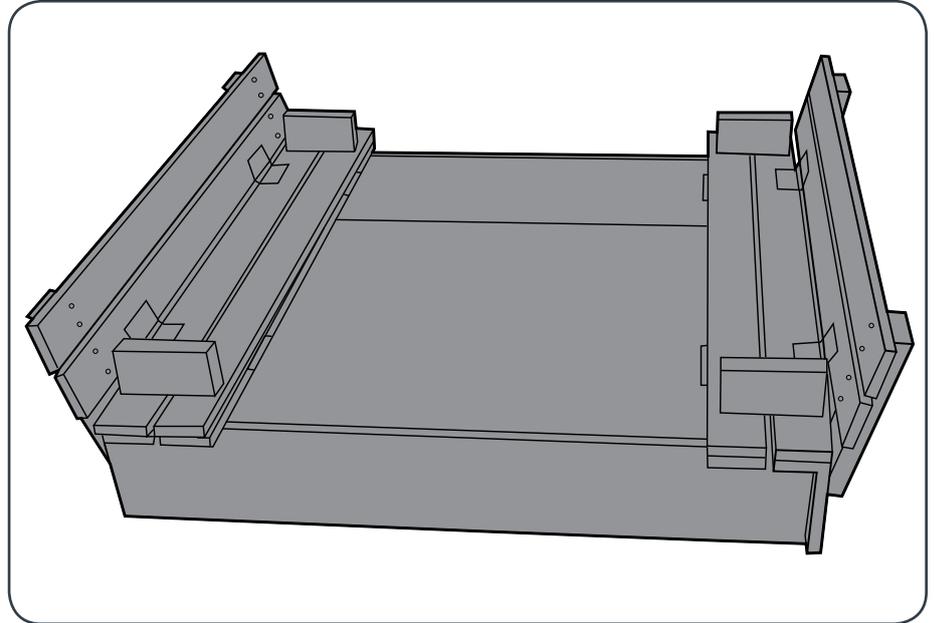

WHAT YOU'LL NEED

Timber:

- 2 x Treated Pine Sleepers: 200mm x 50mm x 2400mm
- 1 x Treated Pine Timber: 90 x 45 x 2400mm
- 6 x Treated Pine Decking Boards: 90 x 22 x 2400mm

Fasteners:

- 48 x 40mm Screws (8-10g)
- 32 x 20mm Screws (8-10g)
- 8 x 75mm Coach Screws

Accessories:

- 8 x 75mm Hinges
- 1 x 8mm Timber Drill Bit
- 1 x Socket for Impact Wrench
- 1 x Pencil
- 1 x PH2 Driver Bit (Phillips Head)
- 1 x Tape Measure

Safety Equipment:

- Safety glasses & ear protection



For full safety precautions for each tool please refer to product manuals.

CUT LIST:

Treated Pine Sleepers -
Cut 2 lengths at 1200mm
& cut 2 lengths at 1100mm

Treated Pine Timber -
Cut 2 lengths at 420mm
& cut 2 lengths at 190mm

Treated Pine Decking -
Cut 12 lengths at 1200mm

SAFETY TIPS:

Please ensure that any loose clothing, hair, lanyards, etc. are secured and cannot make contact with tools while in use.

Wait until all tools are completely stopped before resting the tool on the bench.


Ensure all personal safety equipment is used suitable to the application.

If you are unsure of how to use any of the tools listed ask someone who has the knowledge before attempting to use the product.


Please also refer to the product manual for usage instructions and tips.

Set Up


- 1 Create a basic box, in-setting the short sides as shown to the right. Using a drill driver pre-drill the holes and then screw in 2 coach screws at each end of the sleeper using an impact wrench.

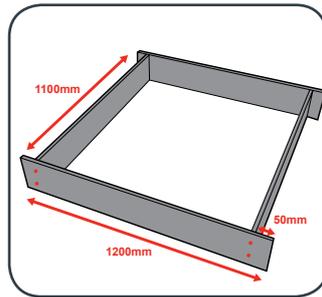


- 2 Cut the treated pine decking boards to 1200mm long and screw 2 to each end of the box using 40mm screws and drill driver. Use 2 screws at both ends of each decking board. Have a gap of 10mm between boards and ensure the screw heads are flush with the top of the boards.

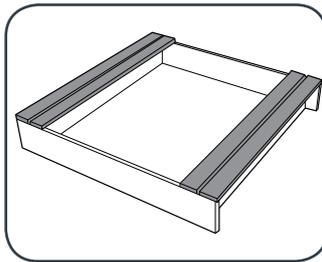


- 3 Cut the treated 90 x 45mm pine at 190mm and screw to 2 pine decking boards with a 10mm gap as shown above. Use 2 screws at both ends of each decking boards. Create 2 of these.

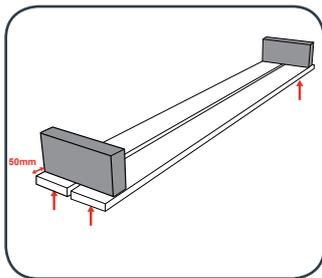


- 4 Place seat bases into position and attach 2 hinges to each using 4 x 20mm screws in each hinge.

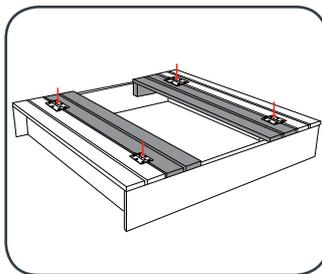


- 5 Cut 90 x 45mm pine at 420mm and screw to 2 pine decking boards, in-setting the timber 50mm from the edge. Ensure a 10mm gap is left between the boards as shown to the right. Create 2 of these.

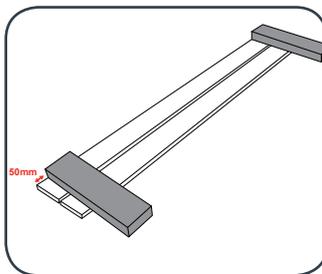

- 6 Screw 4 more hinges to the under side of the seat back rest.

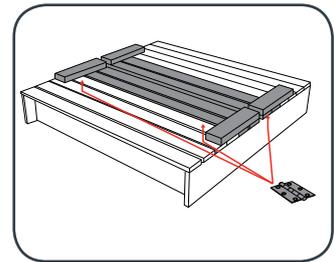

- 7 Now you can fold open the sandpit to create a seat.

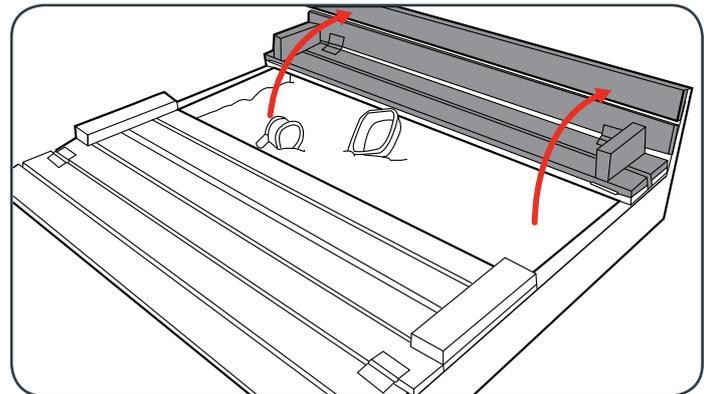

Finishing Touches

To extend the life of your sandpit, you can protect the timber with a coat of paint or varnish. Now add some sand and enjoy!

